


Supermicro SuperChassis SC113TQ-600WB 1U 8xSFF FIX PSU

Kod producenta: CSE-113TQ-600WB

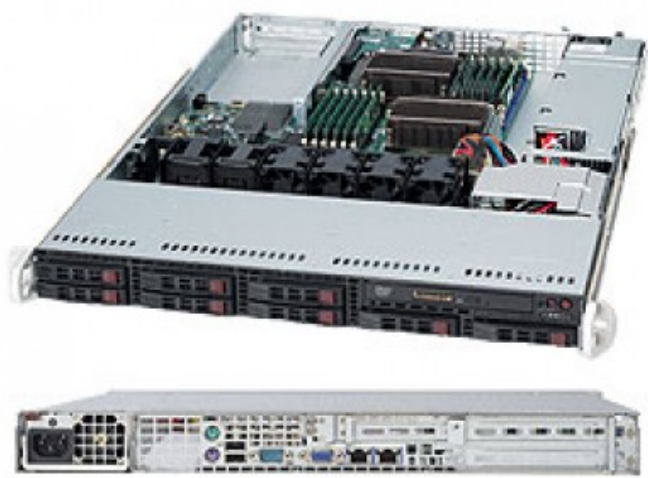

Chassis Form Factor	Rack 1U
# of 2.5 hot-swap bays	8
Power Supply	Fixed
PSU Wattage	600W
PSU Certification	80+ Platinum
Chassis Dimensions	437 x 43 x 597mm

Poniżej prezentujemy szczegółowy opis techniczny oferowanego produktu:

Product SKUs

CSE-113TQ-600WB • SuperChassis 113TQ-600WB (Black)

Form Factor

1U chassis support for max. motherboard size - 13.68" x 13" E-ATX; optimized for WIO motherboards

Processor Support

Supports dual, single Intel® / AMD processors

Dimensions

- Height • 1.7" (43mm)
- Width • 17.2" (437mm)
- Depth • 23.5" (597mm)
- Packaging • 25" (W) x 6" (H) x 33" (L)
- Gross Weight • 35 lbs (16kg)
- Available Color • Black

Expansion Slots

- 2x Full-height PCI Expansion Slots (Riser Card Required)
- 1x Low-profile PCI Expansion Slot (Riser Card Required)

Drive Bays

- Hot-swap • 8x Hot-swap 2.5" SAS / SATA HDD tray
- SAS or enterprise SATA HDD only recommended

SAS / SATA Backplane

1x 1U SAS / SATA backplane with SES2

Peripheral Drives

DVD-ROM • Slim DVD-ROM drive (optional)

Front Panel

- Buttons • Power On/Off button
- System Reset button
- UID button
- LEDs • Power status LED
- HDD activity LED
- 2x Network activity LEDs
- Universal Information (UID) LED

Motherboard (for CSE-113TQ-600WB)

- [X10DDW-i](#)
- [X10DRW-E](#)
- [X10DRW-i](#)
- [X10DRW-N](#)
- [X10SRW-F](#)
- [X9DRD-CNT+](#)
- [X9DRD-iT+](#)
- [X9DRW-iF](#)
- [X9SRW-F](#)
- [X10DDW-iN](#)
- [X10DRW-ET](#)
- [X10DRW-iT](#)
- [X10DRW-NT](#)
- [X11SSW-F](#)
- [X9DRD-CT+](#)
- [X9DRW-3F](#)
- [X9SRW-F](#)

Server(s) for SC113TQ-600WB

[1028R-TDW](#)

System Cooling

- Fans • 4x 40x56mm Counter-rotating PWM fans

Operating Environment (System)

- Operating Temperature Range • 5°C ~ 35°C (41°F ~ 95°F)
- Non-Operating Temperature Range • -40°C ~ 60°C (-40°F ~ 140°F)
- Operating Relative Humidity Range • 8% ~ 90% (non-condensing)
- Non-Operating Relative Humidity Range • 5% - 95% (non-condensing)

Power Supply

- 600W High-Efficiency Power Supply w/PMBus 1.2, I²C, PFC, and Digital Switching
- AC Input • 100-240V, 50-60Hz, 7.5A max
- +3.3V: 15A
- +5V: 18A
- DC Output • +5V standby: 3A
- +12V: 49A
- -12V: 0.5A



Certification

Platinum Certified
[[Test Report](#)]

Regulatory (Power Supply)

- USA - UL listed, FCC
- Canada - CUL listed
- Power Supply Safety / EMC • CCC Certification
- EN 60950/IEC 60950-Compliant
- Europe/CE Mark
- Germany - TUV Certified

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-superchassis-sc113tq-600wb-1u-8xsff-fix-psu-p-2215.html>