


Supermicro MBD-X10DRD-iTP, Dual SKT, Intel C612 Chipset, SATA, 2x10Gb SFP+, IPMI

Kod producenta: MBD-X10DRD-iTP-O

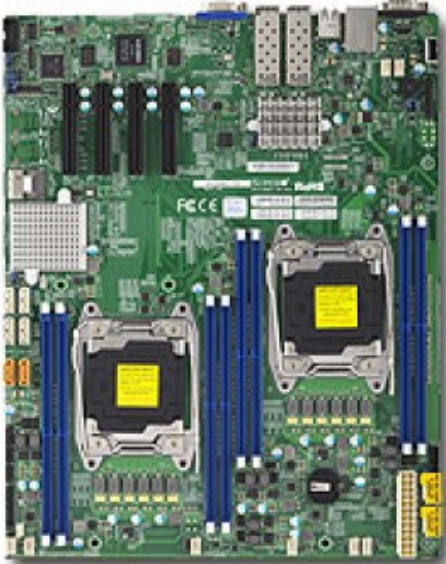

Category	Server
Form Factor	E-ATX
Dimensions	13" x 10.5"
CPU Socket	LGA 2011 (Socket R3)
# of CPU sockets	2
Supported CPU's	Intel Xeon E5-2600v3 Intel Xeon E5-2600v4
Chipset	Intel C612 Wellsburg
Memory Type	DDR4 ECC 3DS LRDIMM DDR4 ECC LRDIMM DDR4 ECC RDIMM
Memory Speed	2400 MHz 2133 MHz 1866 MHz 1600 MHz
# of DIMM's	8
Max Memory Size	1024 GB
Integrated GPU	Aspeed AST2400
# of PCIe x8 3.0	4
# of USB Ports	4 x USB 2.0 (rear) 2 x USB 2.0 (header) 1 x USB 2.0 Type A
# of SATA Ports	10
# of SATA DOM power	2
Storage Controllers	6 x AHCI iSATA 6Gb/s 4 x sSATA 6Gb/s
Integrated RAID	0,1,5,10
# of Serial Ports	1 x Fast UART 16550 (rear) 1 x Fast UART 16550 (header)
# of 10GbE Ports	2 x RJ45
Network Controllers	Intel 82599ES Dual port 10Gigabit SFP+
Integrated BMC	IPMI Dedicated RJ45
BMC chip	Aspeed AST2400
TPM	1 x TPM 1.2 20-pin Header

Product SKUs		Chassis (Optimized for X10DRD-iTP)	
MBD-X10DRD-iTP • X10DRD-iTP (Standard Retail -O Pack)		1U Chassis:	• SC815TO-R500CB • SC514-505 • SC514-441 • SC514-R400C • To support the new generation Intel® Xeon® processor-based motherboards, Revision M chassis is recommended. Please talk to your sales representative for details. • Optional I/O shield
Physical Stats		Important Chassis Notes	MCP-260-00095-0N will require in 1U chassis
Form Factor • E-ATX			
Dimensions • 13.05" x 10.5" (33.1cm x 26.7cm)		Expansion Slots	
Processor/Cache		PCI-Express	• 4x PCI-E 3.0 x8 slots
CPU	• Intel® Xeon® processor E5-2600 v4/v3 family (up to 145W TDP**) • Dual Socket R3 (LGA 2011)	System BIOS	
Cores / Cache	• Up to 22 Cores ¹ / Up to 55MB ¹ Cache	BIOS Type	• 128Mb SPI Flash EEPROM with AMI BIOS • Plug and Play (PnP) • PCI 2.3
System Bus	• QPI up to 9.6 GT/s	BIOS Features	• ACPI 1.0 / 2.0 / 3.0 / 4.0 • USB Keyboard support • SMBIOS 2.7.1 • UEFI 2.3.1
Note	¹ BIOS version 2.0 or above is required	Management	• Intel Node Manager • IPMI 2.0
System Memory		Software	• NMI • SuperDoctor® 5 • Watch Dog
			Power Configurations
Memory Capacity	• 8x 288-pin DDR4 DIMM slots • Up to 1TB¹ ECC 3DS LRDIMM, 512GB ECC RDIMM	PC Health Monitoring	
Memory Type	• 2400/2133/1866/1600MHz ECC DDR4 SDRAM 72-bit	Voltage	• Monitors for CPU Cores, +3.3V, +5V, +12V, +5V Standby, +3.3V Standby, VBAT, Memory Voltages. • 6 Phase-switching voltage regulator
DIMM Sizes	• RDIMM: 64GB, 32GB, 16GB, 8GB, 4GB • LRDIMM: 64GB, 32GB • 3DS LRDIMM: 128GB		FAN
Memory Voltage	• 1.2 V	Temperature	
Error Detection	• Corrects single-bit errors		• Monitoring for CPU and chassis environment • CPU thermal trip support
On-Board Devices		LED	• Thermal Control for 8x Fan Connectors • Thermal Monitor 2 (TM2) support • PECI
Chipset	• Intel® C612 chipset	Other Features	• CPU / System Overheat LED • Suspend static indicator LED • UID/Remote UID
AHCI SATA	• SATA3 (6Gbps); RAID 0, 1, 5, 10	Operating Environment	
SCU SATA	• SATA3 (6Gbps); RAID 0, 1, 5, 10 • Support for Intelligent Platform Management Interface v.2.0	Operating Temperature Range	• 10°C - 35°C (50°F - 95°F)
IPMI	• IPMI 2.0 with virtual media over LAN and KVM-over-LAN support • ASPEED AST2400 BMC • Intel® 82599ES Dual port 10G SFP+ • Virtual Machine Device Queues	Non-Operating Temperature Range	• -40°C - 70°C (-40°F - 158°F)
Network Controllers	• reduce I/O overhead • Supports 10G SFP+ • 1x Realtek RTL8201N PHY (dedicated IPMI)	Operating Relative Humidity Range	• 8% - 90% (non-condensing)
Video	• ASPEED AST2400 BMC	Non-Operating Relative Humidity Range	
Input / Output			
SATA	• 10x SATA3 (6Gbps) ports		
LAN	• 2x 10 Gigabit Ethernet SFP+ ports • 1x RJ45 Dedicated IPMI LAN port		
USB	• 7x USB 2.0 ports total (4 rear, 2 via headers, 1 Type A)		
Video	• 1x VGA port		
Serial Port / Header	• 2x COM Ports (1 rear, 1 header)		
DOM	• 2x SuperDOM (Disk on Module) ports		
TPM	• 1x TPM Header		

Strona firmowa produktu:
<https://www.superstorage.pl/supermicro-mbd-x10drd-itp-dual-skt-intel-c612-chipset-sata-2x10gb-sfp-ipmi-p-1339.html>