


# Supermicro MBD-X10SRi-F, Single SKT, Intel C612 Chipset, SATA, 2xGbE, IPMI

Part number: MBD-X10SRi-F-O



Form Factor	ATX
Dimensions	12" x 9.6"
CPU Socket	LGA 2011 (Socket R3)
# of CPU sockets	1
Supported CPU's	Intel Xeon E5-2600v4 Intel Xeon E5-2600v3 Intel Xeon E5-1600v3
Chipset	Intel C612 Wellsburg
Memory Type	DDR4 ECC 3DS LRDIMM DDR4 ECC LRDIMM DDR4 ECC RDIMM
Memory Speed	2400 MHz 2133 MHz 1866 MHz 1600 MHz
# of DIMM's	8
Max Memory Size	1024 GB
Integrated GPU	Aspeed AST2400
# of PCIe x16 3.0	1
# of PCIe x4 3.0	1
# of PCIe x8 3.0	2
# of PCIe x4 2.0	1
# of PCIe x2 2.0	1
# of USB Ports	2 x USB 3.0 (rear) 1 x USB 3.0 (header) 1 x USB 3.0 Type A 2 x USB 2.0 (rear) 6 x USB 2.0 (header)
# of SATA Ports	10
# of SATA DOM power	2
Storage Controllers	6 x AHCI iSATA 6Gb/s 4 x sSATA 6Gb/s
Integrated RAID	0,1,5,10
# of Serial Ports	1 x Fast UART 16550 (rear) 1 x Fast UART 16550 (header)
# of 1GbE Ports	2 x RJ45
Network Controllers	Intel i350 Dual Port Gigabit Ethernet
Integrated BMC	IPMI 2.0 KVM-over-LAN Virtual Media over LAN IPMI Dedicated RJ45 PHY
BMC chip	Aspeed AST2400
TPM	1 x TPM 1.2 20-pin Header

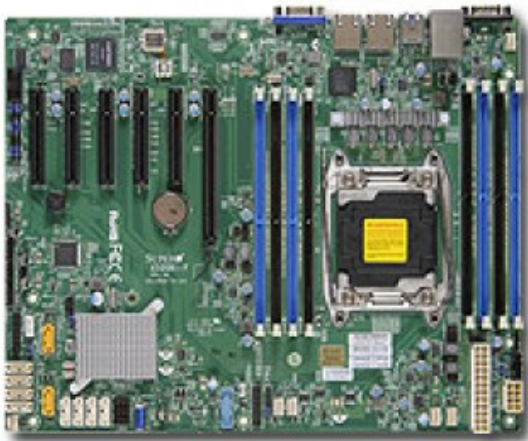

*Visit us for more info:*

<https://www.superstorage.pl/supermicro-mbd-x10sri-single-skt-intel-c612-chipset-sata-2xgbe-ipmi-p-1386.html>