


Supermicro SuperChassis SC216A-R900UB 2U 24xSFF RED PSU

Kod producenta: CSE-216A-R900UB



Chassis Form Factor	Rack 2U
# of 2.5 hot-swap bays	24
Power Supply	Redundant
PSU Wattage	900W

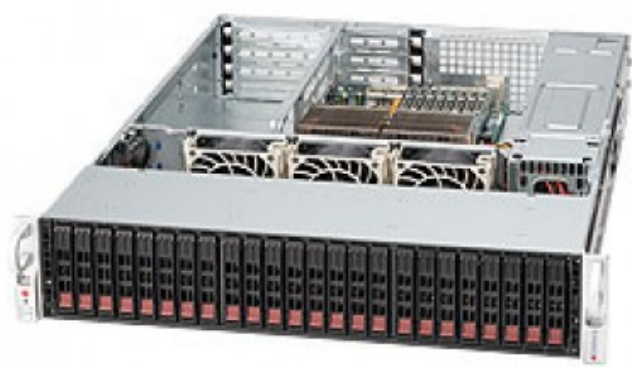

Poniżej prezentujemy szczegółowy opis techniczny oferowanego produktu:

Product SKUs



CSE-216A-R900UB • SuperChassis 216A-R900UB (Black)

Form Factor



- 2U chassis in E-ATX
- Support for maximum motherboard size of 13.68" x 13"
 - Optimized for Universal I/O (UIO) motherboard

Processor Support



Supports dual, single Intel® / AMD processors

Dimensions



- | | |
|------------------------|-----------------------------------|
| Width | • 17.2" (437mm) |
| Height | • 3.5" (89mm) |
| Depth | • 24.8" (630mm) |
| Packaging | • 26.5" (W) x 10.5" (H) x 38" (L) |
| Gross Weight | 54 lbs (24.5kg) |
| Available Color | Black |

Expansion Slots



- 1x Full-height Universal I/O Expansion Slot (Riser Card Required)
- 3x Full-height, Full-length expansion slot
- 3x Low-profile Expansion Slots

Drive Bays



- | | |
|-----------------|---|
| | 24x 2.5" SAS / SATA Hot-swap drive trays |
| Hot-swap | SAS or enterprise SATA HDD only recommended |

Backplane



- 2U Direct Attached Backplane, features:
- 3Gb/6Gb support
 - SES-2 Enclosure Management Support
 - SAS/SATA support
 - Six SFF 8087 connectors

Front Panel



- | | |
|----------------|---|
| Buttons | <ul style="list-style-type: none">• Power On/Off button• System Reset button |
| LEDs | <ul style="list-style-type: none">• Power LED• Hard drive activity LED• 2x Network activity LEDs• System Overheat LED• Power fail LED |



Motherboard (for CSE-216A-R900UB)



[H8DGU](#)

[H8DGU-F](#)



System Cooling



Fans 3x 80mm 7000 RPM PWM fans

System Monitoring



Chassis intrusion switch



Operating Environment (System)



- | | |
|---------------------------------------|--------------------------------|
| Operating Temperature Range | • 5°C ~ 35°C (41°F ~ 95°F) |
| Non-Operating Temperature Range | • -40°C ~ 60°C (-40°F ~ 140°F) |
| Operating Relative Humidity Range | • 8% ~ 90% (non-condensing) |
| Non-Operating Relative Humidity Range | • 5% - 95% (non-condensing) |

Power Supply & Power Distributor



- | | |
|------------------------|---|
| | 900W (1 + 1) Redundant AC to DC power supply w/ PFC |
| AC Voltage | • 100 - 240V, 60-50Hz, 11-4.5 Amp |
| +5V standby | • 4 Amp |
| +12V | • 75 Amp |
| With Power Distributor | <ul style="list-style-type: none">• +5V: 45 Amp• +3.3V: 24 Amp• -12V: 0.6 Amp |

Regulatory (Power Supply)



- | | |
|----------------------------------|--|
| Power Supply Safety / EMC | <ul style="list-style-type: none">• USA - UL listed• Canada - CUL listed• Germany - TUV Certified• EN 60950/IEC 60950-Compliant• CB Report• CCC Certification |
|----------------------------------|--|

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-superchassis-sc216a-r900ub-2u-24xsff-red-psu-p-2320.html>

