


Supermicro MBD-X10DRW-iT, Dual SKT, Intel C612 Chipset, SATA, 2x10GbE, IPMI Bulk

Kod producenta: MBD-X10DRW-iT-B



Form Factor	Proprietary WIO
Dimensions	12.3" x 13"
CPU Socket	LGA 2011 (Socket R3)
# of CPU sockets	2
Supported CPU's	Intel Xeon E5-2600v4 Intel Xeon E5-2600v3
Chipset	Intel C612 Wellsburg
Memory Type	DDR4 ECC 3DS LRDIMM DDR4 ECC LRDIMM DDR4 ECC RDIMM
Memory Speed	2400 MHz 2133 MHz 1866 MHz 1600 MHz
# of DIMM's	16
Max Memory Size	2048 GB
Integrated GPU	Aspeed AST2400
# of PCIe x16 3.0	1
# of USB Ports	4 x USB 3.0 (rear) 2 x USB 3.0 (header)
# of SATA Ports	10
Storage Controllers	6 x AHCI iSATA 6Gb/s 4 x sSATA 6Gb/s
Integrated RAID	0,1,5,10
# of Serial Ports	1 x Fast UART 16550 (header)
# of 10GbE Ports	2 x Base-T
Network Controllers	Intel x540 Dual Port 10 Gigabit Base-T
Integrated BMC	IPMI 2.0 KVM-over-LAN Virtual Media over LAN IPMI Dedicated RJ45 PHY
BMC chip	Aspeed AST2400
TPM	1 x TPM 1.2 20-pin Header
Status	1x PCI-E 3.0 x16 for Add-on Module (AOM) Riser card support: Left side - 1 PCI-E 3.0 x32 Right side - 1 PCI-E 3.0 x16
Uwagi	1x PCI-E 3.0 x16 for Add-on Module (AOM) Riser card support: Left side - 1 PCI-E 3.0 x32 Right side - 1 PCI-E 3.0 x16

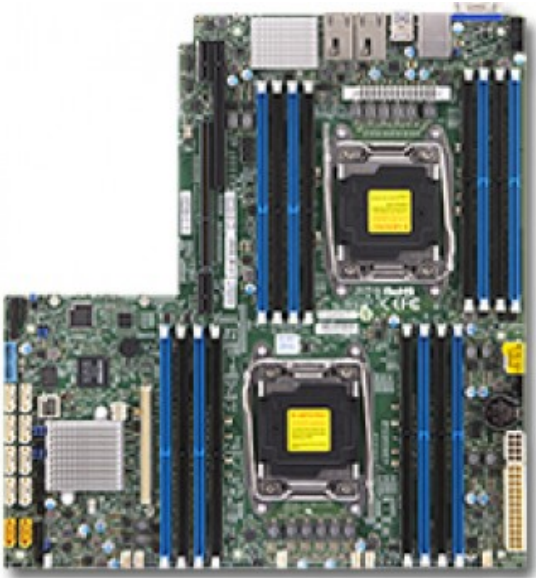