


Supermicro SuperChassis SC815TQC-R706WB2 1U 4xLFF RED PSU

Kod producenta: CSE-815TQC-R706WB2

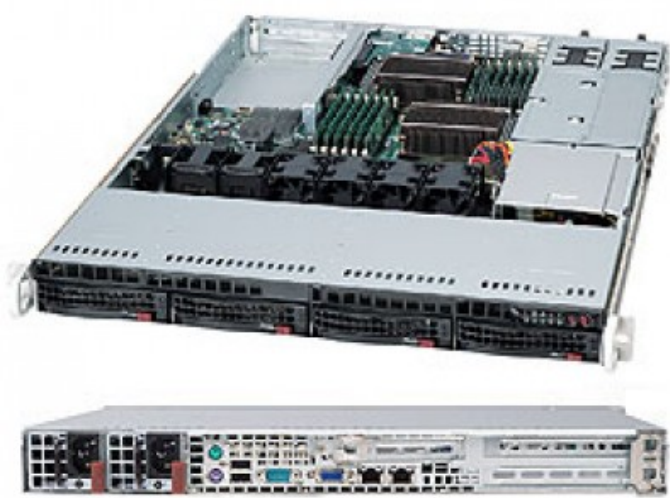

Chassis Form Factor	Rack 1U
# of 3.5 hot-swap bays	4
Power Supply	Redundant
PSU Wattage	750W
PSU Certification	80+ Platinum
Chassis Dimensions	437 x 43 x 650mm
Uwagi	SAS3 12Gb/s Support

Product SKUs

CSE-815TQC-R706WB2 • SuperChassis 815TQC-R706WB2

Form Factor

- Optimized for X11 WIO (W series) motherboards

Processor Support

- Single and Dual Intel® and AMD processors

Dimensions

Height - 1.7" (43 mm)
Width - 17.2" (437 mm)
Depth - 25.6" (650 mm)
Gross Weight - 36 lbs (16.33 kg)
Packaging (W x H x L) - 23.5" (597 mm) x 8.5" (216 mm) x 33.7" (856 mm)
Available Color - Black

Expansion Slots

- 2 full-height & full-length expansion slot(s)
- 1 low-profile expansion slot(s)

Drive Bays

- 4 x 3.5" hot-swap SAS/SATA
- SAS or enterprise SATA HDD only recommended

Backplane

1U 4-Port 12Gbps Backplane Support 4x3.5" SAS3/SATA3 HDD/SSD

Front Panel

- Buttons
- Power On/Off button
 - System Reset Button
 - Unit Identification (UID) button
- LEDs
- 2 Network Activity LEDs
 - Fan Fail/System Over Heat LED
 - HDD activity LED
 - Power Status LED
 - Unit Identification (UID) LED

Motherboard (for CSE- 815TQC-R706WB2)
X11DDW-L X11DDW-NT

Servers (for CSE- 815TQC-R706WB2)
6019P-WTR

Systems Cooling

Fans - 4 x 40x56mm counter-rotation PWM fan(s)

Operating Environment (System)

Operating Temperature Range - 5°C - 35°C (41°F - 95°F)
Non-Operating Temperature Range - -40°C - 70°C (-40°F - 158°F)
Operating Relative Humidity Range - 8% - 90% (non-condensing)
Non-Operating Relative Humidity Range - 5% - 95% (non-condensing)

Power Supply

1U Redundant 700/750W Single Output Power Supply Platinum level, 54.5mm width
Power Efficiency - 94%
Total Output Power and Input - 700W with Input 100 - 140Vac
- 750W with Input 200 - 240Vac
AC Input Frequency - 50-60Hz
Dimensions (L x W x H) - 320 x 54.5 x 40.25 mm
Output Type - Backplanes (gold finger)
- Max: 58A / Min: 0.5A (100Vac - 140Vac)
+12V - Max: 62A / Min: 0.5A (200Vac - 240Vac)
+5Vsb - Max: 3A / Min: 0A
- PDB-PT112-S2424
- O/P: 12V/54A
Power Distributor - +5V Max: 25
- +3.3V Max: 25
- -12V Max: 0.6
Certification - **Platinum Certified**

Regulatory (Power Supply)

Power Supply Safety / EMC - BSMI
- CCC
- CE/EMC
- FCC class A
- UL/CB

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-superchassis-sc815tqc-r706wb2-1u-4xlff-red-psu-p-3620.html>