


WYPRZEDAŻ !!! Supermicro SuperChassis SC815TQC-R504WB2 1U 4xLFF RED PSU

Kod producenta: CSE-815TQC-R504WB2(U)

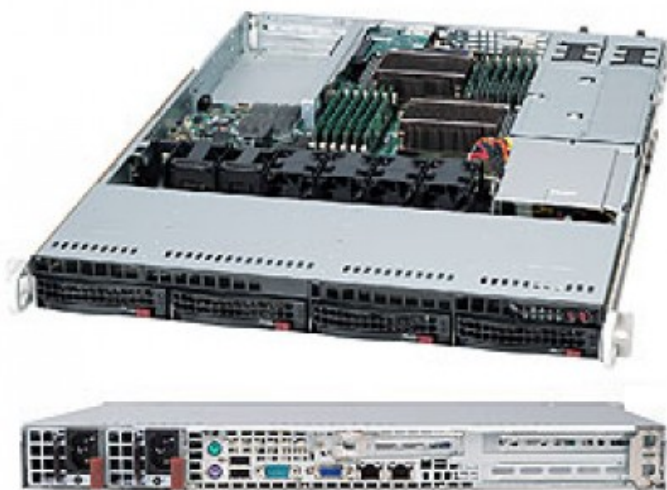

Chassis Form Factor	Rack 1U
# of 3.5 hot-swap bays	4
Power Supply	Redundant
PSU Wattage	500W
PSU Certification	80+ Platinum
Chassis Dimensions	437 x 43 x 650mm
Uwagi	SAS3 12Gb/s Support

UWAGA !!! Towar wyprzedażowy/potestowy - może nosić ślady użytkowania. 100% sprawny i z pełną gwarancją.

Poniżej prezentujemy szczegółowy opis techniczny oferowanego produktu:

Product SKUs



CSE-815TQC-R504WB2 • SuperChassis 815TQC-R504WB2

Form Factor



- Optimized for X11 WIO (W series) motherboards

Processor Support



- Single and Dual Intel® and AMD processors

Dimensions



Height	- 1.7" (43 mm)
Width	- 17.2" (437 mm)
Depth	- 25.6" (650 mm)
Gross Weight	- 36 lbs (16.33 kg)
Packaging (W x H x L)	- 23.5" (597 mm) x 8.5" (216 mm) x 33.7" (856 mm)
Available Color	- Black

Expansion Slots



- 2 full-height & full-length expansion slot(s)
- 1 low-profile expansion slot(s)

Drive Bays



- 4 x 3.5" hot-swap SAS/SATA
- SAS or enterprise SATA HDD only recommended

Backplane



- 1U 4-Port 12Gbps Backplane Support 4x3.5" SAS3/SATA3 HDD/SSD

Front Panel



Buttons	- Power On/Off button - System Reset Button - Unit Identification (UID) button - 2 Network Activity LEDs - Fan Fail/System Over Heat LED
LEDs	- HDD activity LED - Power Status LED - Unit Identification (UID) LED

Systems Cooling



Fans	- 4 x 40x56mm counter-rotation PWM fan(s)
------	---

Operating Environment (System)



Operating Temperature Range	- 5°C - 35°C (41°F - 95°F)
Non-Operating Temperature Range	- -40°C - 70°C (-40°F - 158°F)
Operating Relative Humidity Range	- 8% - 90% (non-condensing)
Non-Operating Relative Humidity Range	- 5% - 95% (non-condensing)

Power Supply

1U 500W Redundant Single Output power supply W/PMbus 54.5mm width

Power Efficiency	- 94%
Total Output Power and Input	- 500W with Input 100 - 240Vac
AC Input Frequency	- 50-60Hz
Dimensions (L x W x H)	- 320 x 54.5 x 40.25 mm
Output Type	- Backplanes (gold finger)
+12V	- Max: 42A / Min: 0.5A (100Vac - 240Vac)
+5Vsb	- Max: 4A / Min: 0A
Power Distributor	- PDB-PT112-S2424
	- O/P: 12V/54A
	- +5V Max: 25
	- +3.3V Max: 25
	- -12V Max: 0.6
Certification	- Platinum Certified

Regulatory (Power Supply)



Power Supply Safety / EMC	- BSMI - CCC - CE/EMC - FCC class A - TUV/CB - UL/CUL
---------------------------	---

Strona firmowa produktu:

<https://www.superstorage.pl/wyprzedaz-supermicro-superchassis-sc815tqc-r504wb2-1u-4x1ff-red-psu-p-5911.html>