


Supermicro MBD-X9SRi-3F, Single SKT, Intel C606 Chipset, SATA, SAS2, 2xGbE, IPMI Bulk

Kod producenta: MBD-X9SRi-3F-B

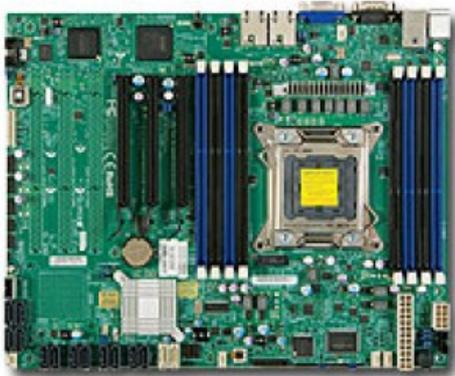

Form Factor	ATX
Dimensions	12" x 9.6"
CPU Socket	LGA 2011 (Socket R)
# of CPU sockets	1
Supported CPU's	Intel Xeon E5-2600v2 Intel Xeon E5-1600v2 Intel Xeon E5-2600 Intel Xeon E5-1600
Chipset	Intel C602 Patsburg
Memory Type	DDR3 ECC LRDIMM DDR3 ECC RDIMM DDR3 ECC UDIMM DDR3 non-ECC UDIMM
Memory Speed	1866 MHz 1600 MHz 1333 MHz 1066 MHz
# of DIMM's	8
Max Memory Size	512 GB
Integrated GPU	Matrox G200eW
# of PCIe x16 3.0	1
# of PCIe x8 3.0	1
# of PCIe x4 2.0	1
# of USB Ports	2 x USB 2.0 (rear) 6 x USB 2.0 (header) 1 x USB 2.0 Type A
# of SATA Ports	6
# of SATA DOM power	1
# of SAS Ports	8
Storage Controllers	2 x AHCI iSATA 6Gb/s 4 x AHCI iSATA 3Gb/s 8 x SCU SAS 3Gb/s
Integrated RAID	0,1,5,10
Hardware RAID	0,1,10
# of Serial Ports	1 x Fast UART 16550 (rear) 1 x Fast UART 16550 (header)
# of 1GbE Ports	2 x RJ45
Network Controllers	Intel i350 Dual Port Gigabit Ethernet
Integrated BMC	IPMI 2.0 KVM-over-LAN Virtual Media over LAN IPMI Dedicated RJ45 PHY
BMC chip	Nuvoton WPCM450RA0BX
TPM	1 x TPM 1.2 20-pin Header
Uwagi	PCI-Express Slots Configuration: 1x PCI-E 3.0 x16 slot 1x PCI-E 3.0 x8 (in x16) slot 1x PCI-E 2.0 x4 (in x16) slot

Product SKUs

MBD-X9SRi-3F -B • X9SRi-3F (Bulk Pack)

Physical Stats

Form Factor • ATX

Dimensions • 12" x 9.6", (30.5cm x 24.4cm)

Processor/Cache

CPU - Single Socket R (LGA 2011)
- Intel® Xeon® processor
E5-2600/1600
and **E5-2600/1600 v2** family†
(up to 12 cores and up to 135W)
† BIOS version 3.0 or above is required

Note † E5-1600 series CPU does not support LRDIMM type memory

System Memory

Memory Capacity - 8x 240-pin DDR3 DIMM slots
- Up to 512GB DDR3 ECC LRDIMM
- Up to 256GB DDR3 ECC RDIMM
- Up to 64GB DDR3 ECC/non-ECC UDIMM
Memory Type - 1866/1600/1333/1066MHz ECC
DDR3 SDRAM 72-bit, 240-pin gold-plated DIMMs
DIMM Sizes - 32GB, 16GB, 8GB, 4GB, 2GB, 1GB, 64GB LRDIMM
Memory Voltage - 1.5 V, 1.35 V
Error Detection - Corrects single-bit errors
- Detects double-bit errors (using ECC memory)

On-Board Devices

Chipset - Intel C606 chipset
SATA - SATA3 (6Gb/s) and SATA2 (3Gb/s)
- RAID 0, 1, 5, 10 support (Windows)
- RAID 0, 1, 10 support (Linux)
- Support for Intelligent Platform Management Interface v.2.0
- IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
IPMI - NUVOTON WPCM450RA0BX
- 1x Realtek RTL8201N PHY (dedicated IPMI)
- Intel® i350 Dual Port Gigabit Ethernet
Network Controllers - Virtual Machine Device Queues reduce I/O overhead
- Supports 10BASE-T, 100BASE-TX, and 1000BASE-T, RJ45 output
Video - Matrox G200eW 16MB DDR2 graphics
Super I/O - Nuvoton NCT 6776F

Input / Output

SATA - 2 SATA 3.0 ports (6Gb/s)
- 4 SATA 2.0 ports (3Gb/s)
SCU - 8 SAS/SATA (3Gb/s) ports via SCU
LAN - 2 RJ45 Gigabit Ethernet LAN ports
- 1 RJ45 Dedicated IPMI LAN port
USB - 9 USB 2.0 ports total (2 rear + 6 via header + 1 Type A)
Video - 1 VGA port
Keyboard/Mouse - 2 PS/2 Keyboard/Mouse ports
Serial Port / Header - 1 serial port (rear) and 1 serial header (side)
DOM - 1 DOM (Disk on Module) power connector

Chassis (Optimized for X9SRi-3F)

1U Chassis - [CSE-113MTQ-330CB](#)
- [CSE-512F-350B](#)
- [CSE-512F-441B](#)
- CSE-811TQ-R441B
- [CSE-813MTQ-350C](#)
- [CSE-813MTQ-441CB](#)
- [CSE-813MTQ-R400CB](#)
- To support motherboards based on Intel® Xeon® processor 5500/3500 series, **Revision K** or later chassis is recommended for most models. Please talk to your sales representative for details.

Expansion Slots

PCI-Express - 1 (x16) PCI-E 3.0 slot
- 1 (x8) PCI-E 3.0 (in x16) slot
- 1 (x4) PCI-E 2.0 (in x16) slot

System BIOS

BIOS Type - 128Mb SPI Flash EEPROM with AMI BIOS
- Plug and Play (PnP)
- APM 1.2
- DMI 2.3
- PCI 2.3
BIOS Features - ACPI 1.0 / 2.0 / 3.0 / 4.0
- USB Keyboard support
- Hardware BIOS Virus protection
- SMBIOS 2.7.1
- UEFI 2.3.1
- RTC (Real Time Clock) Wakeup

Management

Software - IPMI (Intelligent Platform Management Interface) v1.5 / 2.0 with KVM support
- [SuperDoctor® III](#)
- Watch Dog
- NMI
Power Configurations - ACPI / APM Power Management
- Keyboard Wakeup from Soft-Off
- CPU Fan auto-off in sleep mode
- Power-on mode for AC power recovery

PC Health Monitoring

Voltage - Monitors for CPU Cores, +3.3V, +5V, ±12V, +5V Standby, VBAT, HT, Memory, Chipset Voltages.
- Total of 8 fan headers supporting up to 8 fans
- Eight 4-pin fan headers
- 8 fans with tachometer status monitoring
FAN - Status monitor for speed control
- Status monitor for on/off control
- Low noise fan speed control
- Pulse Width Modulated (PWM) fan connectors
- Monitoring for CPU and chassis environment
Temperature - CPU thermal trip support
- I²C temperature sensing logic
- Thermal Monitor 2 (TM2) support
- PECI
LED - CPU / System Overheat LED
- Suspend static indicator LED
- UID/Remote UID
Other Features - Chassis intrusion detection
- Chassis intrusion header
- Chipkill support
- RoHS, Halogen Free

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-mbd-x9sri-3f-single-socket-intel-c606-chipset-sata-sas2-2xgbe-ipmi-bulk-p-2637.html>